

# Cylinder Ojo 6"



|          |  |                |  |
|----------|--|----------------|--|
| Job Name |  | Catalog Number |  |
| Notes    |  | Type           |  |



## FEATURES

- Modular design allows for configurations that are tailored to your project requirements
- Six different optics (15, 24, 36, and 60 degree) make the Ojo the perfect choice for projects requiring the same fixture to be placed at different mounting heights to achieve different light levels
- 80 CRI light engines allow for color-rich environments with natural materials to be experienced as they were intended.
- Trims engineered with a high level of glare control provide increased levels of occupant comfort.
- 0-10v and Triac dimming are both possible with the same driver.
- Multiple mounting options (cable pendant, rigid stem pendant, surface mount and wall mount) permit greater design flexibility while maintaining the same form factor.

## PERFORMANCE / WATTAGE DATA


| Wattage Options | 2700K<br>Ra>80      | 3000K<br>Ra>80      | 3500K<br>Ra>80      | 4000K<br>Ra>80      |
|-----------------|---------------------|---------------------|---------------------|---------------------|
| 40w             | 4000 lm<br>100 lm/w | 4200 lm<br>105 lm/w | 4320 lm<br>108 lm/w | 4400 lm<br>110 lm/w |

| Trim Color Multiplier       | Black | Gold | Clear Alzac |
|-----------------------------|-------|------|-------------|
| Multiplier for Lumen Output | 0.92  | 0.97 | 0.94        |

\* Data based on 60° optic and white trim

## Dimensions

## Anti-Glare Trim

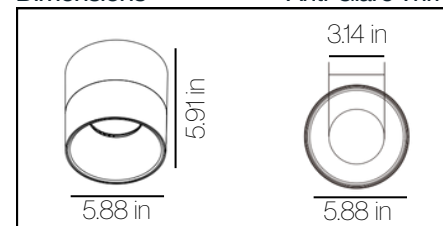

## Cable Mount




## Stem Mount

## Surface Mount



## Wall Mount

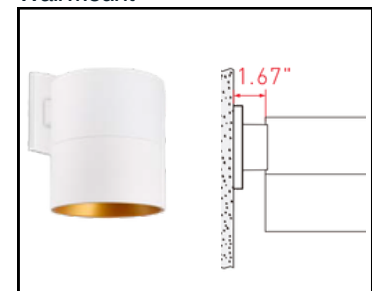

# Cylinder Ojo 6"



|          |  |                |  |
|----------|--|----------------|--|
| Job Name |  | Catalog Number |  |
| Notes    |  | Type           |  |

## Product Ordering Guide

**Cylinder Part Number** (Example: OJO6-30-D1-15-BK-WH-PC-C04-RJ)

| Cylinder                                                                                                                                                                                                              | Wattage                                                                                                                                                                                                           | CCT / CRI                                                                                                                                                                                                                                                        | Dimming (120-277V)                                                                                            | Optic                                                                                                                                                                                               | Housing Finish                                                                                | Trim Finish                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OJO6                                                                                                                                                                                                                  | <input type="checkbox"/> 40 (40 Watts)                                                                                                                                                                            | <div><input type="checkbox"/> 27 (2700K / 80 CRI 4000 lm)</div> <div><input type="checkbox"/> 30 (3000K / 80 CRI 4200 lm)</div> <div><input type="checkbox"/> 35 (3500K / 80 CRI/ 4320 lm)</div> <div><input type="checkbox"/> 40 (4000K / 80 CRI 4400 lm)</div> | <input type="checkbox"/> D1 (0-10V Dims to 1%) Triac dimming (120V only)                                      | <div><input type="checkbox"/> 15 Narrow Beam</div> <div><input type="checkbox"/> 24 Medium Beam</div> <div><input type="checkbox"/> 36 Wide Beam</div> <div><input type="checkbox"/> 60 Flood</div> | <div><input type="checkbox"/> BK (Black)</div> <div><input type="checkbox"/> WH (White)</div> | <div><input type="checkbox"/> WH White</div> <div><input type="checkbox"/> BK Black</div> <div><input type="checkbox"/> GL Gold</div> <div><input type="checkbox"/> CL Clear</div> |
| Mounting                                                                                                                                                                                                              | Cable / Stem (Pendants only)                                                                                                                                                                                      | Ceiling Type                                                                                                                                                                                                                                                     | Media Option                                                                                                  | Emergency Function                                                                                                                                                                                  |                                                                                               |                                                                                                                                                                                    |
| <div><input type="checkbox"/> PC Pendant Cable</div> <div><input type="checkbox"/> PS Pendant Rigid Stem</div> <div><input type="checkbox"/> SM Surface Mount</div> <div><input type="checkbox"/> WM Wall Mount</div> | <div><input type="checkbox"/> C04 4' Cable</div> <div><input type="checkbox"/> C96 8' Cable</div> <div><input type="checkbox"/> R4 4' Rigid Pendant</div> <div><input type="checkbox"/> R8 8' Rigid Pendant</div> | <div><input type="checkbox"/> RJ Recessed J-Box pendant mount</div> <div><input type="checkbox"/> SJ Conduit cutout surface mount junction box</div>                                                                                                             | <div><input type="checkbox"/> None</div> <div><input type="checkbox"/> HC Honeycomb for anti glare trim</div> | <div><input type="checkbox"/> None</div> <div><input type="checkbox"/> EM 8w emergency LED driver</div>                                                                                             |                                                                                               |                                                                                                                                                                                    |

## Distribution Diagram

