

Cylinder Ojo 8"



Job Name		Catalog Number	
Notes		Type	



FEATURES

- Modular design allows for configurations that are tailored to your project requirements
- Six different optics (15, 24, 36, and 60 degree) make the Ojo the perfect choice for projects requiring the same fixture to be placed at different mounting heights to achieve different light levels
- 80 CRI light engines allow for color-rich environments with natural materials to be experienced as they were intended.
- Trims engineered with a high level of glare control provide increased levels of occupant comfort.
- 0-10v and Triac dimming are both possible with the same driver.
- Multiple mounting options (cable pendant, rigid stem pendant, surface mount and wall mount) permit greater design flexibility while maintaining the same form factor.


PERFORMANCE / WATTAGE DATA

Wattage Options	2700K Ra>80	3000K Ra>80	3500K Ra>80	4000K Ra>80
58w	4930 lm 85 lm/w	5220 lm 90 lm/w	5394 lm 93 lm/w	5510 lm 80 lm/w

Trim Color Multiplier	Black	Gold	Clear Alzac
Multiplier for Lumen Output	0.92	0.97	0.94

* Data based on 60° optic at maximum wattage and white trim

Dimensions

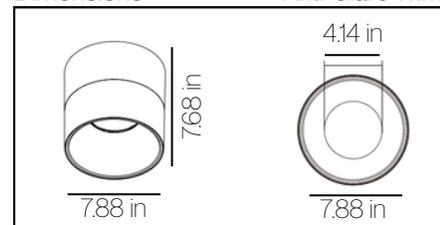

Anti-Glare Trim

Cable Mount



Stem Mount

Surface Mount



Wall Mount



Cylinder Ojo 8"



Job Name		Catalog Number	
Notes		Type	


Product Ordering Guide

Cylinder Part Number (Example: OJO8-30-D1-15-BK-WH-PC-C04-RJ)

Cylinder	Wattage	CCT / CRI	Dimming (120-277V)	Optic	Housing Finish	Trim Finish
OJO6	<input type="checkbox"/> 58 (58 Watts)	<input type="checkbox"/> 27 (2700K / 80 CRI 4930 lm)	<input type="checkbox"/> D1 (0-10V Dims to 1% Triac dimming (120V only))	<input type="checkbox"/> 15 Narrow Beam	<input type="checkbox"/> BK (Black) <input type="checkbox"/> WH (White)	<input type="checkbox"/> WH White
		<input type="checkbox"/> 30 (3000K / 80 CRI 5220 lm)		<input type="checkbox"/> 24 Medium Beam		<input type="checkbox"/> BK Black
		<input type="checkbox"/> 35 (3500K / 80 CRI/ 5394 lm)		<input type="checkbox"/> 36 Wide Beam		<input type="checkbox"/> GL Gold
		<input type="checkbox"/> 40 (4000K / 80 CRI 5510 lm)		<input type="checkbox"/> 60 Flood		<input type="checkbox"/> CL Clear

Mounting	Cable / Stem (Pendants only)	Ceiling Type	Media Option	Emergency Function
<input type="checkbox"/> PC Pendant Cable	<input type="checkbox"/> C04 4' Cable	<input type="checkbox"/> RJ Recessed J-Box pendant mount	<input type="checkbox"/> None	<input type="checkbox"/> None
<input type="checkbox"/> PS Pendant Rigid Stem	<input type="checkbox"/> C96 8' Cable	<input type="checkbox"/> SJ Conduit cutout surface mount junction box	<input type="checkbox"/> HC Honeycomb for anti glare trim	<input type="checkbox"/> EM 8w emergency LED driver
<input type="checkbox"/> SM Surface Mount	<input type="checkbox"/> R4 4' Rigid Pendant			
<input type="checkbox"/> WM Wall Mount	<input type="checkbox"/> R8 8' Rigid Pendant			

Distribution Diagram

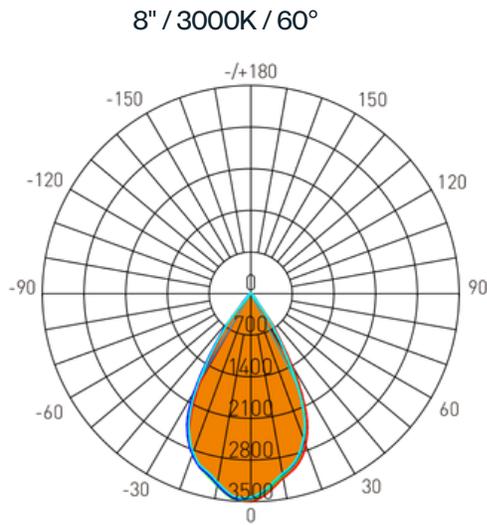

Lumens: 6000.6 Lm
Watts: 60 W
LPW: 95.85 Lm/W
CCT: 3000K

UNIT: cd
 C0/180,57.5 °
 C30/210,57.8 °
 C60/240,58.0 °
 C90/270,57.5 °

