

Cylinder Ojo 4"



Job Name		Catalog Number	
Notes		Type	



FEATURES

- Modular design allows for configurations that are tailored to your project requirements
- Four different optics (15, 24, 36, and 60 degree) make the Ojo the perfect choice for projects requiring the same fixture to be placed at different mounting heights to achieve different light levels
- 80 CRI light engines allow for color-rich environments with natural materials to be experienced as they were intended.
- Trims engineered with a high level of glare control provide increased levels of occupant comfort.
- 0-10v and Triac dimming are both possible with the same driver.
- Multiple mounting options (cable pendant, rigid stem pendant, surface mount and wall mount) permit greater design flexibility while maintaining the same form factor.


PERFORMANCE / WATTAGE DATA

Wattage Options	2700K Ra>80	3000K Ra>80	3500K Ra>80	4000K Ra>80
25 W	2250lm 90 lm/w	2375lm 95 lm/w	2450 lm 98 lm/w	2500 lm 100 lm/w

* Data based on 25w with white trim and 60° optic


Trim Color Multiplier	Black	Gold	Clear Alzac
Multiplier for Lumen Output	0.92	0.97	0.94

Dimensions

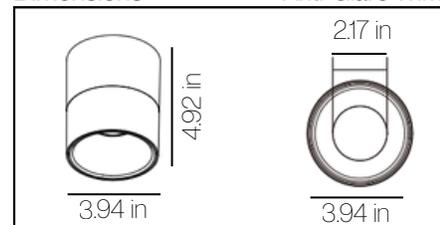


Anti-Glare Trim

Cable Mount

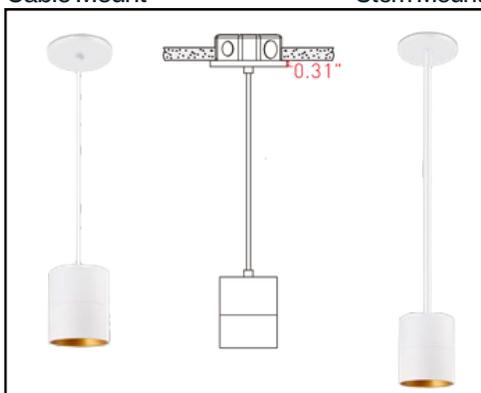


Stem Mount

Surface Mount

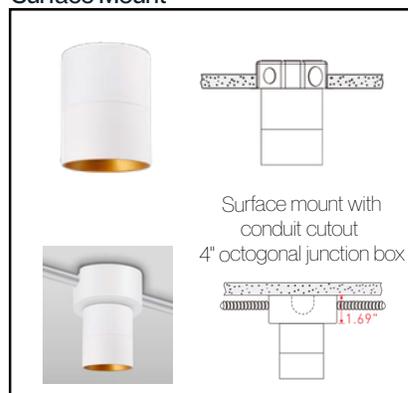

Wall Mount

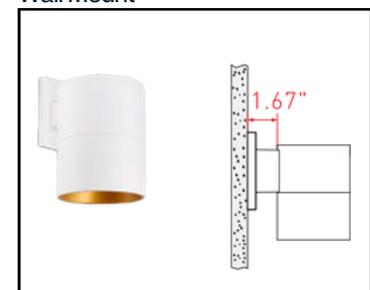

Cylinder Ojo 4"



Job Name		Catalog Number	
Notes		Type	


Product Ordering Guide

Cylinder Part Number (Example: OJO4-30-D1-15-BK-WH-PC-C04-RJ)

Cylinder	Wattage	CCT / CRI	Dimming (120-277V)	Optic	Housing Finish	Trim Finish
OJO4	<input type="checkbox"/> 25 (25 Watts)	<input type="checkbox"/> 27 (2700K / 80 CRI/2250 lm)	<input type="checkbox"/> D1 (0-10V Dims to 1% Triac dimming (120V only))	<input type="checkbox"/> 15 Narrow Beam	<input type="checkbox"/> BK (Black) <input type="checkbox"/> WH (White)	<input type="checkbox"/> WH White
		<input type="checkbox"/> 30 (3000K / 80 CRI/2375 lm)		<input type="checkbox"/> 24 Medium Beam		<input type="checkbox"/> BK Black
		<input type="checkbox"/> 35 (3500K / 80 CRI / 2450 lm)		<input type="checkbox"/> 36 Wide Beam		<input type="checkbox"/> GL Gold
		<input type="checkbox"/> 40 (4000K / 80 CRI / 2500 lm)		<input type="checkbox"/> 60 Flood		<input type="checkbox"/> CL Clear

Mounting	Cable / Stem (Pendants only)	Ceiling Type	Media Option	Emergency Function
<input type="checkbox"/> PC Pendant Cable	<input type="checkbox"/> C04 4' Cable	<input type="checkbox"/> RJ Recessed J-Box pendant mount	<input type="checkbox"/> None	<input type="checkbox"/> None
<input type="checkbox"/> PS Pendant Rigid Stem	<input type="checkbox"/> C96 8' Cable	<input type="checkbox"/> SJ Conduit cutout surface mount junction box	<input type="checkbox"/> HC Honeycomb for 15°-60° beam anti glare trim	<input type="checkbox"/> EM 8w emergency LED driver
<input type="checkbox"/> SM Surface Mount	<input type="checkbox"/> R4 4' Rigid Pendant			
<input type="checkbox"/> WM Wall Mount	<input type="checkbox"/> R8 8' Rigid Pendant			

Distribution Diagram

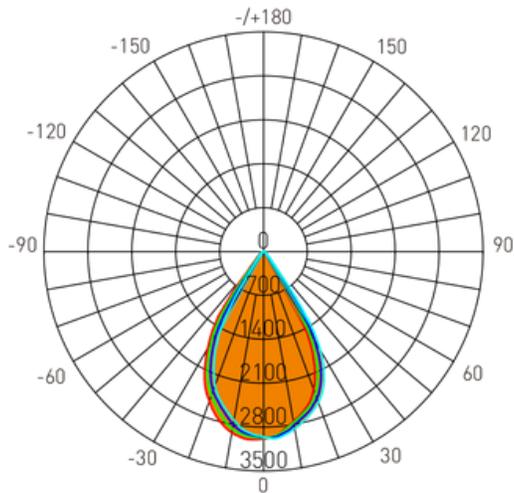

AVERAGE BEAM ANGLE[50%]: 61.0°

Lumens: 2612.6 Lm
Watts: 25 W
LPW: 103.94 Lm/W
CCT: 3000K

UNIT: cd
 — C0/180,61.0°
 — C30/210,61.1°
 — C60/240,61.1°
 — C90/270,60.7°

